

JOSKIN

www.joskin.com

MUCK SPREADERS

AN INCOMPARABLE RANGE

MUCK SPREADER ACTION

- € 200 NET/m³

Up to € 5,600 NET. Action valid until 30.11.24. Offer subject to conditions.

3 year
warranty




T5516/16V

Get the most out of your manure!
A range of muck spreaders for optimal fertilization.


Siroko

The Siroko is a muck spreader for any farmer who is looking for **quality, attractive price** and **versatility**. Its low, narrow body, combined with large wheels, ensures easy traction and reduced ground pressure, making it suitable for all types of terrain. It is the ideal partner for small and medium-sized farms.


The dimensions below are given in meters (m) without extensions.




= - € 1,600 NET




= - € 1,800 NET



= - € 2,200 NET

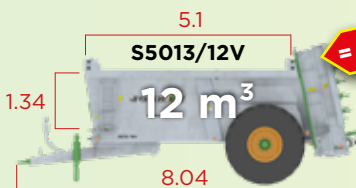

= - € 2,400 NET

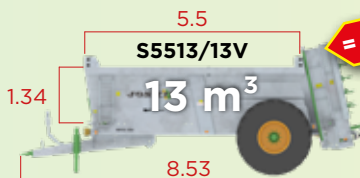

= - € 2,600 NET



Ribbed side walls - Movable axle - Special steel upper body edge - Ø 900 mm beaters - Reversible special steel teeth.



2 shipping chains (Ø 14 mm) with welded, closed slats.



Tractor power:
MAX. 130 hp



Tyre height (max.): 1,790 mm
Tyre width (max.): 697 mm







ON
0 NET/m³

Ferti-CAP

The Ferti-CAP is the evolution of the traditional muck spreader. It is designed for medium-sized farms. It can easily be converted into a trailer, offering a flexible solution in addition to manure fertilization.

The dimensions below are given in meters (m) without extensions.

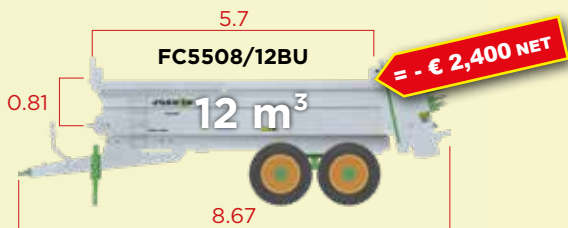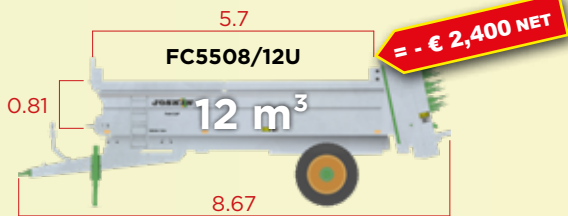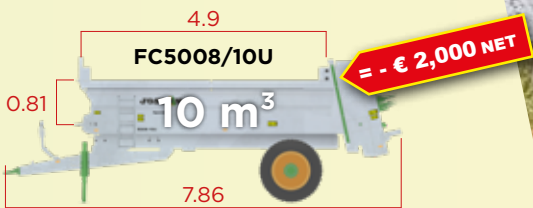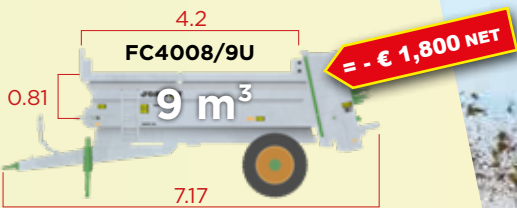

Versatile muck spreader - Ø 1,080 mm beaters with reversible special steel teeth.

FC5508/12U



Tractor power:
MAX. 130 hp



Tyre height (max.): 1,790 mm
Tyre width (max.): 737 mm

2 shipping chains
(Ø 14 mm) with
welded, closed
slats.











FC5508/12BU

Tornado

The Tornado is a muck spreader with **narrow body** for professionals. Its sturdiness, design and easy maintenance make it an economical choice. Its narrow body allows the fitting of very large wheels, which considerably facilitate traction and minimise ground pressure. Its tapered body facilitates the flow of manure towards the beaters. Last but not least, its low centre of gravity guarantees optimal stability on hilly terrain.

The dimensions below are given in meters (m) without extensions.

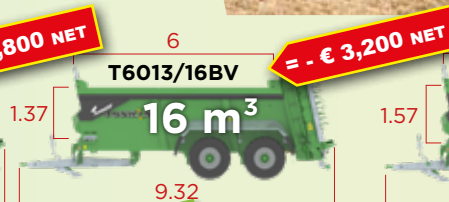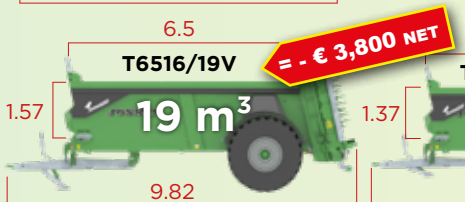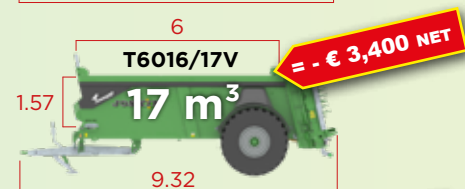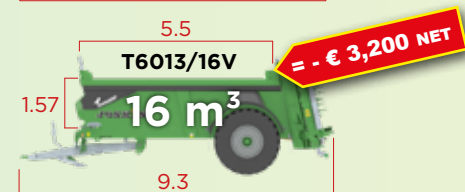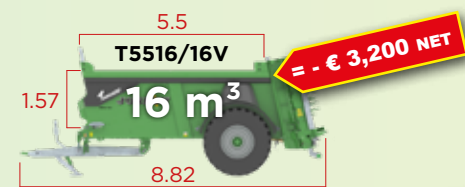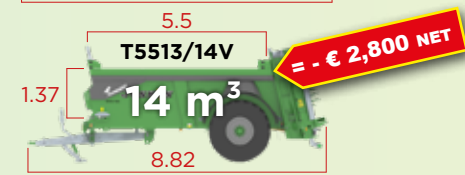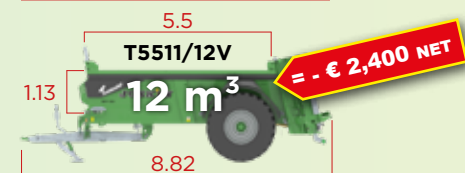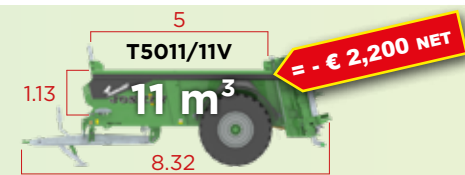

T5513/14V

New, heavy-duty design for contractors.



T5513/14V



2 shipping chains (Ø 16 mm) with bolted, closed slats.



Tractor power:
MIN. 120 hp



Tyre height (max.): 2,060 mm
Tyre width (max.): 716 mm

ON
0 NET/m³

Ferti-SPACE2

The JOSKIN Ferti-SPACE2 is the contractor's ally for intensive spreading works. Its **double-chassis** design makes it sturdy as well as an effective choice, with XXL versatility thanks to its **large-volume tapered body** and **oversized beaters**.

The dimensions below are given in meters (m) without extensions.










FS6511/18BU

A professional muck spreader with numerous options for moving and spreading the most fibrous and heavy materials.



FS7014/25TRU

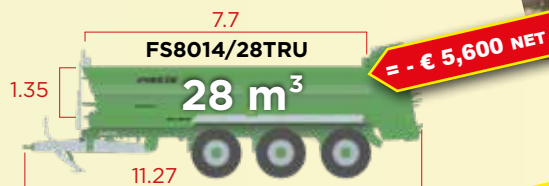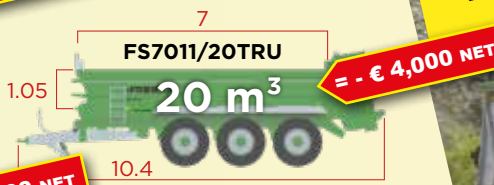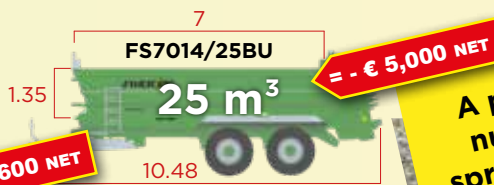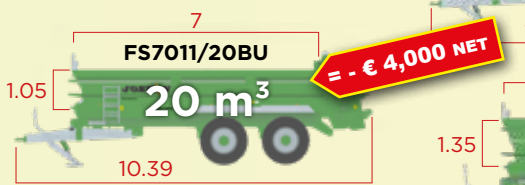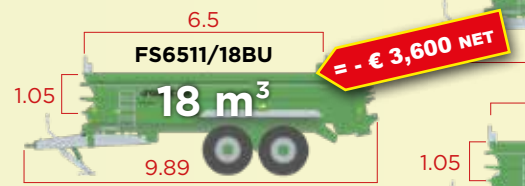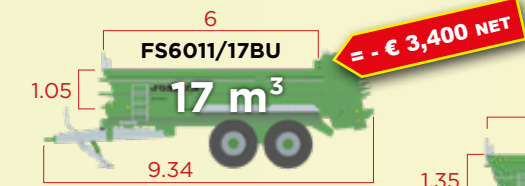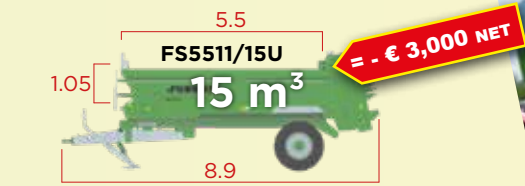

Tractor power:
MIN. 120 hp




Tyre height (max.): 1,505 mm
Tyre width (max.): 800 mm

4 shipping chains (Ø 16 mm) with bolted, closed slats.



Maximise your harvest with u



Uniform distribution of manure to avoid the creation of overloaded or under-spread areas.



Preservation of nutrients, improving their use in crops and reducing the risk of losses.



Soil protection to guarantee its long-term fertility and maintain the sustainability of the farming practices.





niform, horizontal spreading!

FERTI-SPACE HORIZON

Beaters with 600 mm diameter, 320 rpm, steel teeth (S700MC) and cord cutter.



2 spreading discs with 1,040 mm diameter, 500 rpm and 6 adjustable blades.



ACTION





- € 200 NET/m³



Tornado HORIZON

The Tornado HORIZON, with its tapered body, **horizontal beaters** and **spreading table**, ensures even product distribution over large working widths of up to 24 m, depending on the products to be spread. Its design is based on the vertical model, but offers a spreading capacity with a low quantity per hectare.

The dimensions below are given in meters (m) without extensions.

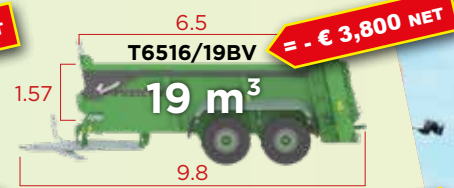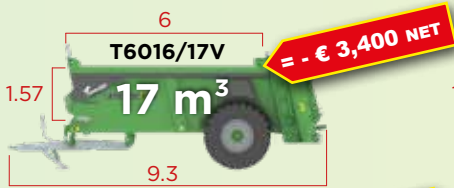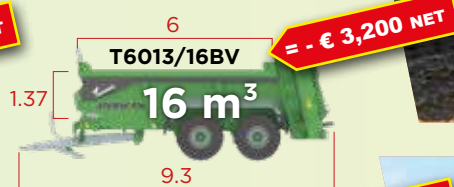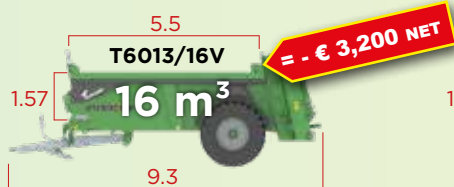

Tractor power:
MIN. 160 hp



Tyre height (max.): 2,060 mm
Tyre width (max.): 716 mm

ON
0 NET/m³



HORIZON models are fitted with an automatic hydraulic drawbar suspension. It includes a cylinder on both sides of the drawbar, each combined with a nitrogen accumulator.



T5516/16V







T5516/16V

Ferti-SPACE2 HORIZON

The Ferti-SPACE2 HORIZON offers an XXL capacity with its **wide, tapered body** and its spreading table ensuring a **uniform** and **regular** spreading pattern. It is the ideal ally for contractors who need to transport and spread large volumes over large areas with a precise quantity per hectare.

The dimensions below are given in meters (m) without extensions.

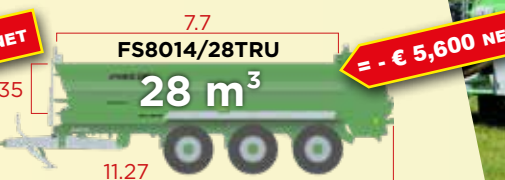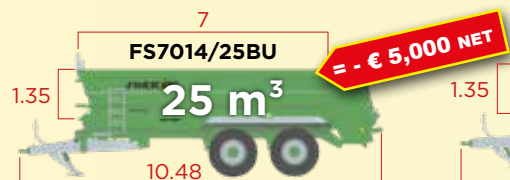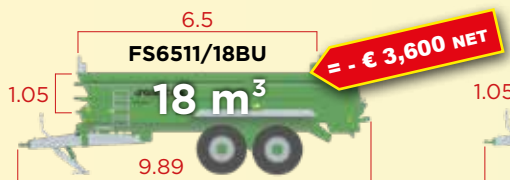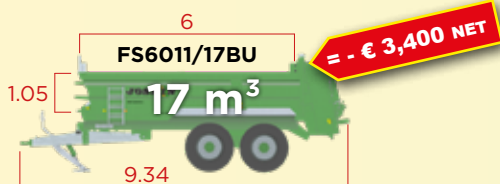

3 horizontal beaters for regular supply of the spreading discs and perfect spreading.



Tractor power:
MIN. 160 hp



Tyre height (max.): 1,505 mm
Tyre width (max.): 800 mm

ON
0 NET/m³



For maintenance, cleaning or composting, the spreading canopy opens to 100°.



FS6511/18BU



FS7014/25TRU

JOSKIN Advantages

Long-Term Guaranteed Follow-Up and Quality



Expertise in **spreading and efficiency**



Expertise in **production**

ACTION
- € 200 NET/m³
Up to € 5,600 NET.



Expertise in **surface treatment (galvanising and painting)** for a quality assurance



IT expertise for an **easy, ongoing follow-up with our dealers**



Expertise in spare parts with an **individualised spare parts book** generated automatically on MyJOSKIN using the chassis number. A **safe value on the second-hand market** for all JOSKIN machines on a **very long term**.



Expertise in after-sales service with a **3-year warranty** and a **permanent stock of spare parts**

